

DECLARATION OF PERFORMANCE
Nr. 074/CPR/140701

1. Unique identification code of the product-type: **P.T.B.-SILICONE SN&NA**
2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):
The batch number is printed on the packaging
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:
Sealant for facade application exterior and interior – Conform EN 15651-1:2012 Type F EXT-INT
Sealant for sanitary joints – Conform EN 15651-3:2012 Type S
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):
POLYTECHNISCH BEDRIJF BVBA/SPRL – P.T.B.-COMPAKTUNA®
INDUSTRIEPARK ZWIJNAARDE 6
9052 GENT - BELGIUM
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2): **Not relevant**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **System 3**
7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:

The notified body **GINGER CEBTP No. NB 0074** performed the determination of the product type based on type testing under system 3 and issued: a test report
The notified body **EFFECTIS No. NB 1234** performed the determination of the class as regards the reaction to fire under system 3 and issued: a test report
8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued: **Not relevant**
9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire (classification according EN 13501-1:2007)	Class E	EN 15651-1:2012
Release of chemicals dangerous to the environment and health	NPD	EN 15651-1:2012
Water and air tightness		
Resistance to flow (according EN ISO 7390)	≤ 3 mm	EN 15651-1:2012 EN 15651-3: 2012
Loss of volume (according EN ISO 10563)	≤ 10 %	EN 15651-1:2012 EN 15651-3: 2012
Tensile properties for “non structural” low modulus sealants used in joints in “cold climate” areas (- 30°C) – according EN ISO 8339	NPD	EN 15651-1:2012



DECLARATION OF PERFORMANCE
Nr. 074/CPR/140701

Tensile properties for “non structural” sealants used in joints in “cold climate” areas (- 30°C) at maintained extension – according EN ISO 8340	NPD	EN 15651-1:2012
Tensile properties <ul style="list-style-type: none">• at maintained extension after water immersion (according EN ISO 10590)	Pass	EN 15651-1:2012
Microbiological growth according EN ISO 846:1997 procedure B	0	EN 15651-3:2012
Durability	Pass	EN 15651-1:2012 EN 15651-3: 2012
Conditioning: method A Substrate: <ul style="list-style-type: none">• Façade: Anodized Aluminium + M2 concrete• Sanitary: Anodized Aluminium		

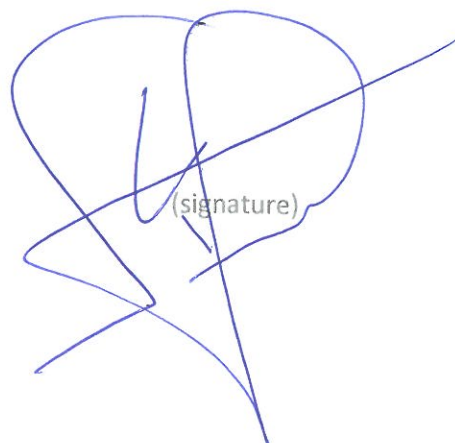
10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

K. SMESSAERT, Managing Director
(name and function)

GENT, 01/07/2014
(place and date of issue)


(signature)