





P.T.B.-FILLER

Water-repellent jointing mortar for facing bricks

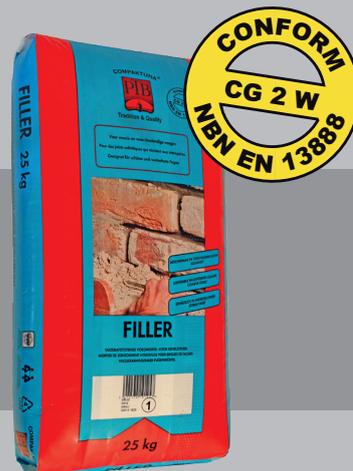

Characteristics



Ready-to-use, dry mortar, with water-repellent formulation, composed of refined and sieved sand, cement and special additives. P.T.B.-FILLER is used for jointing all masonry made up off bricks, natural stone, etc. P.T.B.-FILLER comes in different colours which can be blended in dry condition, if necessary.

P.T.B.-FILLER can be classified as CG 2 W.

TECHNICAL CHARACTERISTICS	Corresponds to the requirements according NBN EN 13888
Flexural strenght after dry storage	≥ 2,5
Flexural strenght after freeze-thaw cycles	≥ 2,5
Compressive strenght after dry storage	≥ 15
Compressive strenght after freeze-thaw cycles	≥ 15
Shrinkage	≤ 3 mm/m
Reduced water absorption after 30 min. (CG2 W)	≤ 2 g
Reduced water absorption after 240 min. (CG2 W)	≤ 5 g

CALCULATE YOUR QUANTITY ON COMPAKTUNA.be

Mixing ratio	Consumption	Packaging
± 2,5 to 3,75 l water per bag of 25 kg (± 10 to 15 %)	250 g/running meter (joint 1x1 cm)	25 kg PE
Colours	Processing time	Application temperature
Nr. 1 grey, nr. 2 white, nr. 3 light grey, nr. 4 grey-black, nr. 5 beige, nr. 6 rustic, nr. 7 zilvergry, nr. 8 light beige, nr. 10 brick-red, nr. 11 orange, nr. 12 grey brown, nr. 13 dark grey, nr. 14 brown beige, nr. 15 rusty brown	Depending on the temperature humidity and used material	+ 5°C till + 30°C

P.T.B.-FILLER

Directions for use

Wet highly absorbing surfaces prior to application.
Add only ± 10 to 15 % water on the total weight of the P.T.B.-FILLER!
Always add the same quantity of water!

Remarks

- Ready-made cement mortars may, beyond our control, manifest small differences in colouring that are inherent to the cement itself and to the aggregates used. We cannot assume responsibility for such non-conformities.
- We recommend that you acquire the total quantity of product all at the same time for the same job.
- For the jointing of windows and doors we recommend our product P.T.B.-SILICONE SN.
- When pointing recently built walls, these must be at least 1 month old.
- Preferably point façades the same day in order to avoid differences in shade due to weather conditions. Always use the same quantity of mixing water.
- Maintain a width of joint of at least 1 cm.
- Before pointing stone strips, please consult us.
- Refer to 'Technische Voorlichting 208' (Technical Information Bulletin no. 208) – Pointing of masonry.

Packaging

P.T.B.-FILLER is available in grey, white, light grey, grey-black, beige, rustic, zilvergry, light beige, brick-red, orange, grey brown, dark grey, brown beige and rusty brown colour in polyethylene bags of 25 kg. The shelf life is 12 months in the original, closed packaging and kept dry.

Available in the following colours

Ask for the colour card below. (the colours are approximate)

P.T.B.-FILLER
Tradition & Quality

Waterafstotende voegmortel voor gevelstenen
Mortier de jointolement hydrofuge pour briques de façade

COMFORT
CE 2 W
FILLER EN 208

1 grijs / gris	2 wit / blanc	3 lichtgrijs / gris clair	4 grijs-zwart / gris-noir	5 beige	6 rustiek / rustique	7 zilvergrijs / gris argent
8 lichtbeige / beige clair	10 baksteenrood / rouge brique	11 oranje / orange	12 grijsbruin / gris-brun	13 donkergrijs / gris foncé	14 bruinbeige / brun beige	15 roestbruin / brun rouille

www.compaktuna.be 0800/92279

Vraag de technische fiche van onze producten! De beste website: www.compaktuna.be
Compaktuna is een bedrijf dat zich richt op de productie van producten voor de bouwsector. Het bedrijf is gevestigd in België en heeft een uitgebreid netwerk van distributeurs in Nederland, België en Duitsland. Het bedrijf is bekend voor zijn kwaliteit en betrouwbaarheid. Het bedrijf is ook actief in de verkoop van bouwmaterialen en gereedschappen. Het bedrijf is een van de grootste bedrijven in de bouwsector in België. Het bedrijf is ook actief in de verkoop van bouwmaterialen en gereedschappen. Het bedrijf is een van de grootste bedrijven in de bouwsector in België. Het bedrijf is ook actief in de verkoop van bouwmaterialen en gereedschappen. Het bedrijf is een van de grootste bedrijven in de bouwsector in België.



As the applications of our products are diverse, no single application guideline can be laid down. All product data reflect the state of knowledge of our products at the time of publication. Therefore all suggestions and recommendations concerning the use of our products are merely illustrative. Apply the product on a small and insignificant spot before starting to use our products to be sure the desired result is obtained. Always ask for the technical sheet of our products. Visit the website www.compaktuna.be. Consult our "technical department" which can be reached for free on the green number 0800/92279. The Dutch text shall be exclusively binding.
BV POLYTECHNISCH BEDRIJF is EN ISO 9001 certified.