




# VERSTERKINGSVLIES

## P.T.B.-MEMBRAAN WATERDICHT

Polypropylene fabric for reinforcing corners and edges

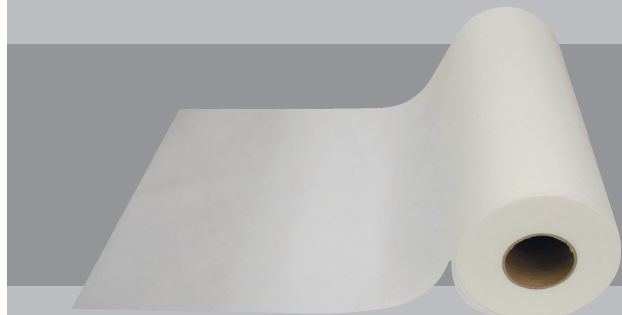

### Application

Versterkingsvlies P.T.B.-MEMBRAAN WATERDICHT can be used as a reinforcement fleece for P.T.B.-MEMBRAAN WATERDICHT. The application of a reinforcement fleece allows to achieve thicker layers in the system. Can be applied to reinforce corners.

The reinforcement fleece is made of thermally welded polypropylene fibers and can resist the action of chemicals. The fleece is flexible and can easily be applied on edges and in corners.

For waterproofing applications where the corners and edges are reinforced with a reinforcement fleece, the reinforcement fleece exists in a width of 12 cm, so that at least 5 cm remains on both sides of the corner.

For airtight construction it may be advisable to apply a wide reinforcement fleece at the height of the first blocks. For this purpose, the reinforcement fleece is also available in a width of 30 cm.



### Directions for use

In critical areas such as corners, around pipes, etc., apply the reinforcement fleece in the still moist P.T.B.-MEMBRAAN WATERDICHT before applying the second and third layers. Immediately apply a coating over the reinforcement fleece so that the fleece is completely impregnated. The total layer thickness of the system shall be at least 1 mm.



### Packaging


For waterproofing application the reinforcement fleece exists in a width of 12 cm on rolls of 25 m long, 12 rolls per box.

For airtight construction the reinforcement fleece exists in a width of 30 cm on rolls of 25 m long, 12 rolls per box.



### TECHNICAL DATA

Quality	PP filament
Colour	White
Stabilization	Thermal
Specific weight (DIN 53854)	approx. 50 g/m <sup>2</sup>
Thickness	approx. 300 µm
Max. long. / trans. tensile force	approx. 115 N / 90 N
Elongation at break	approx. 95%



As the applications of our products are diverse, no single application guideline can be laid down. All product data reflect the state of knowledge of our products at the time of publication. Therefore all suggestions and recommendations concerning the use of our products are merely illustrative. Apply the product on a small and insignificant spot before starting to use our products to be sure the desired result is obtained. Always ask for the technical sheet of our products. Visit the website [www.compaktuna.be](http://www.compaktuna.be). Consult our "technical department" which can be reached for free on the green number 0800/92279. The Dutch text shall be exclusively binding. Version 10/02/2014.  
BV POLYTECHNISCH BEDRIJF is EN ISO 9001 certified.



**P.T.B.-COMPACTUNA®**  
Industriepark III  
Industriepark - Zwijnaarde 6  
9052 Gent - België  
T +32 9 221 11 16 - F +32 9 221 85 01  
RPR Gent RPM  
E-mail: [info@compaktuna.be](mailto:info@compaktuna.be)  
Website: [www.compaktuna.be](http://www.compaktuna.be)  
Oms groen nummer: 0800/92279