


3210 - Rupsdumper laadvermogen 2,5ton - Wacker Neuson DT25

DIMENSIONS		DT25 SWIVEL-TIPPING
A	Length (without running board) mm	3,692
B	Length with self-loading equipment (without running board) mm	-
C	Length of running board mm	-
D	Height over running board mm	-
E	Undercarriage width mm	1,550
F	Skip width mm	1,532
G	Skip length mm	2,122
H	Width with self-loading equipment mm	-
I	Track width mm	320
J	Track length mm	1,319
K	Height over control console mm	-
L	Height over skip hand protector mm	-
M	Concrete mixer width mm	-
N	Height over ROPS rollbar mm	2,500
O	Height over ROPS rollbar (collapsed) mm	1,870
P	Height of skip front edge mm	1,520
Q	Dumping height mm	848
R	Height of skip front edge when raised mm	-
S	Dumping height of high-tipping skip when raised mm	-
T	Max. height, skip raised mm	3,000
U	Max. height, high-tipping skip raised mm	-
V	Skip dumping angle °	90
W	Running board retraction angle °	-
X	Control console width mm	-
Y	Ground clearance mm	349

* with self-loading equipment

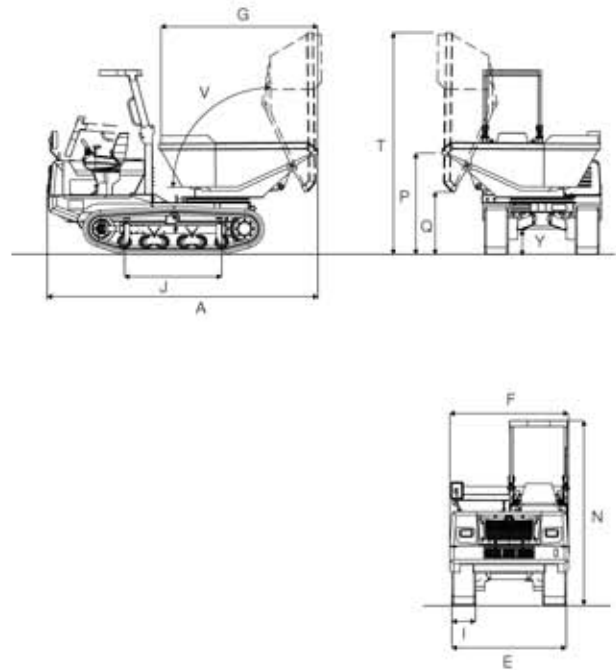

GENERAL		U125 SWIVEL-TIPPING
Operating weight kg		2,765
Operating weight (with driver) kg		2,840
Transport weight kg		2,730
Max. machine payload kg		2,500
Skip capacity - heaped m³		1.5
Skip capacity - levelled m³		1.125
Skip capacity - water level m³		0.77
Self-loading equipment volume/load capacity m³/kg		-

ENGINE	
Manufacturer	Kubota
Type	V-2403 M
Cylinders	4
Fuel type	Diesel
Max. engine output hp/kW	44.9/33
at rpm	2,600
Displacement cm³	2,434
Max. torque daNm	16.3
at rpm	1,600
Cooling system	Water

ELECTRICS	
Battery	1
Voltage/Capacitance V/Ah	12/105

HYDRAULICS	
Pumps	Variable pump
Number	2
Flow rate - total l/min	2x 71
Pumps	Gear pump
Number	2
Flow rate - total l/min	43
Flow rate - Work hydraulics l/min	45
Max. pressure drive hydraulics bar	330
Max. pressure work hydraulics bar	175

OTHER	
Travel speed	2
1st gear km/h	0-5.5
2nd gear km/h	0-11
Ground pressure empty/loaded kg/cm²	0,244/0,499
	70
Max. gradeability %	

CAPACITIES	
Fuel tank l	55
Oil tank l	30

* with self-loading equipment