




THERMOWOOD®

STORM 1

$1\frac{3}{16}$ x $6\frac{1}{2}$

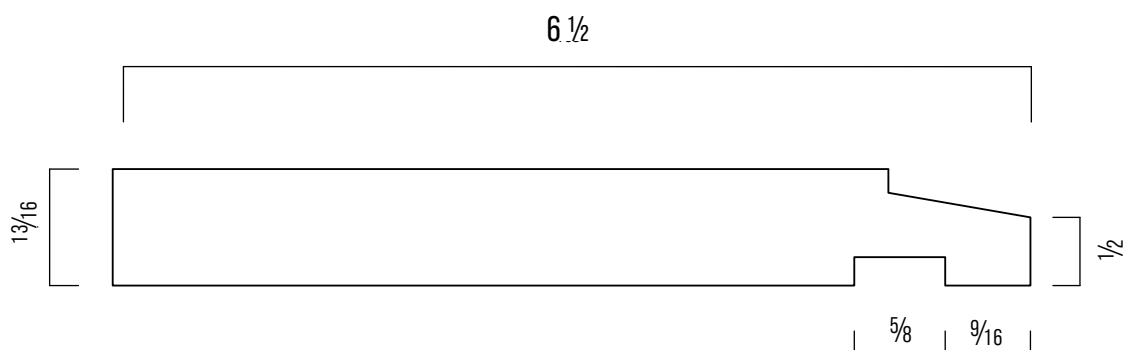

PRODUCT:

DURABILITY CLASS:

APPLICATION:

THERMO-D AYOUS

I

CLADDING & OUTDOOR



**LONG SERVICE LIFE
AND LOW MAINTENANCE**



**CONTROL UNION
Finotrol**

**PATENTED NATURAL PRODUCTION PROCESS
CONTROLLED BY FINOTROL**



**SUSTAINABLE FOREST MANAGEMENT
AND LOW ECOLOGICAL FOOTPRINT**



**LDCWOOD IS MEMBER OF THE INTERNATIONAL
THERMOWOOD® ASSOCIATION (ITWA)**

**LDCWOOD NV/SA
BTW BE 0665.682.393**

**VERGUNNINGENSTRAAT 7
B-8400 OSTEND**

T. +32 59 50 55 14

**PROTECTEDBYNATURE@LDCWOOD.COM
WWW.LDCWOOD.COM**

This product datasheet provides purely informative information about the products and services offered by LDCwood. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood takes the utmost care to ensure that the information is reliable and up-to-date, this product datasheet may contain inaccuracies. LDCwood may change the product datasheet at its own discretion and at any time. All data illustrated in this datasheet (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this product datasheet.