



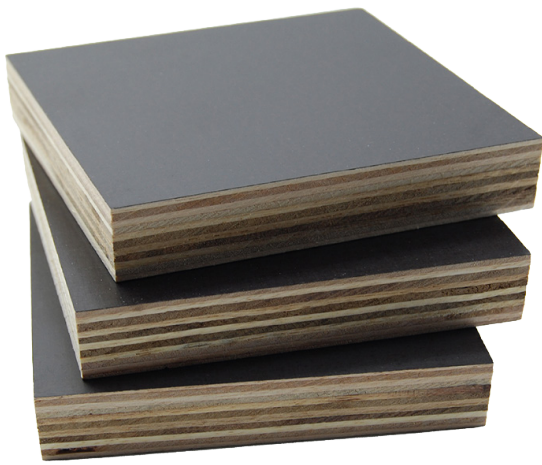

FILM FACED PLYWOOD

ACACIA 3HP



DESCRIPTION

Acacia 3HP film faced plywood consists of a 3-time hot-pressed, 100% plantation acacia panel bonded with melamine resin and finished with a brown concrete film after calibration.

SIZES (mm)

2500 x 1250 mm			
Thickness (mm)	# / pack	# folds	Standard stock
9 mm	100	5+2	x
12 mm	75	7+2	x
15 mm	60	9+2	x
18 mm	50	11+2	x
20 mm			x
21mm	43	13+2	x

Other dimensions and specifications available on request.

APPLICATIONS

Suitable for use in humid environments, for both structural and non-structural applications.

The panel edges are sealed and must be resealed after cutting.

SPECIFICATIONS

COMPOSITION

Core: 100% plantation Acacia, A/B grade
Finish: brown concrete film, 165 g/m²

PRODUCTION

1x Cold press + 3x Hot press + callibration

TOLERANCE

0,5 mm/panel according to EN315

SERVICE CLASSES

EN636-2 S
 CE2+ Structural and non structural use (depending on thickness)

REUSES

5-8 (reuses with proper use)

GLUE

EN314-2/2 (melamine bonding - contact with soil and water must be avoided)

DENSITY

± 600 kg/m³

REACH

Compliant

REACTION TO FIRE CLASS

D-s2,d0 (>=9mm)

CERTIFICATE

FSC® on request