



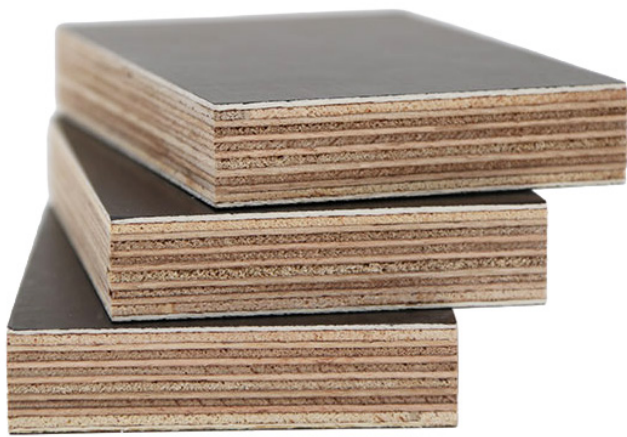

FILM FACED PLYWOOD PREMIUM



DESCRIPTION

Film faced plywood Premium consists of a high-quality eucalyptus core bonded with phenolic resin, finished on both sides with a high-performance phenolic film. The edges are sealed and must be re-treated against moisture with a suitable sealant after processing. The panel is highly flat and carefully calibrated, manufactured using mechanically joined veneers and finished with a premium Dynea concrete film.

APPLICATIONS

For exterior use as a structural and non-structural component. Use:

- for quality work in structural applications and exterior applications.
- in humid and wet environments for structural and non-structural applications.

The edges are sealed and must be resealed if cut or damaged.

SIZES

2500 x 1250 mm			
Thickness (mm)	# / pack	# folds	Standard stock
9 mm	100	5+2	
12 mm	75	7+2	x
15 mm	60	9+2	x
18 mm	50	11+2	x
21 mm	43	13+2	x
24 mm	37		

3000 x 1500 mm			
Thickness (mm)	# / pack	# folds	Standard stock
15 mm		9+2	v
18 mm	38	11+2	v

SPECIFICATIONS

COMPOSITION

Core: 100% A-grade premium eucalyptus (mechanically joined veneers)

Finish: premium Dynea dark brown concrete film 165 g

TOLERANCES

0,3 mm

SERVICE CLASSES

EN636-3 S

CE2+ Structural + non structural use (depending the thickness)

GLUE

EN 314-2/3 (phenolic bonding)

REUSES

Up to 10 reuses with proper use

DENSITY

± 620 kg/m³

MOISTURE CONTENT

8% - 14%

REACTION TO FIRE CLASS

D-s2,d0 (>=9mm)

CERTIFICATE

FSC®