



# Hygiene and HACCP solutions





# Hygiene and HACCP solutions

## What are hygiene solutions?

Paint applied in the healthcare or food sector requires a specific approach. Main fact is that these paints must have an antibacterial action. In laboratories, hospitals, rehabilitation centers, children's day care centers, canteens, kitchens, food procession companies all surfaces have to be continuously hygienic.

In environments where hygienic circumstances are important, bacteria are the biggest enemies. There are different ways to fight bacteria or at least to restrict the growth :

- Avoid presence of a breeding ground or make sure that there are no adhesion possibilities, for instance by using **Aquapox** or **Aquafloor**
- Clean intensively and repeatedly with aggressive detergents or disinfectants, making the coating system highly chemical- and scratch resistant.



PROTECTION MADE EASY



# Hygiene and HACCP solutions

The hygiene and HACCP products of Libert Paints answer largely to the stringent hygiene legislation and the associated standards.

We follow the developments in legislation very closely and adjust our range where necessary.

**Our range includes 9 products :**

- **Saniguard Aquafloor**
- **Saniguard Aquapox**
- **Saniguard Oxypaint SL Floor**
- **Cryltane CF Finish**
- **Mixtane**
- **Cryltane DTS 20**
- **Cryltane DTS 40**
- **Cryltane DTS 60**
- **Liboclean**

These products provide a suitable coating for each substrate. In short, for places where a 100% pure environment is required.



**PROTECTION MADE EASY**





# Hygiene and HACCP solutions




## Advantages :

- Approved for use in places where food is processed
- Easy to apply ! It can be applied with brush, roller or spray. The products are specifically developed for a good flow.
- Tintable in a wide range of colours
- The range contains water based, solvent free and solvent containing products.
- Good to very good product properties in terms of chemical resistance (against both cleaning products as disinfectants), colour stability and gloss retention.
- Good impact resistance for the floor paints. The abrasion and scratch resistance is very good.
- Has already proven its validity with many customers. Our HACCP solutions offer a long protection duration in many circumstances. Moreover, it is very easy to clean !

PROTECTION MADE EASY

# The hygiene range contains the following products :



Germ & Bacteria



## Saniguard Aquafloor

2,5L • 10L



**Aquafloor** is a two-pack water thinnable epoxy floor coating for inside applications such as hospitals, laboratories, catering facilities, workshops, dairy farms, showrooms and schools.

**Aquafloor** has the following properties :

- Can be used as primer on mineral surfaces
- Applicable in a HACCP environment (indirect food contact)
- Good scratch resistance
- Good chemical resistance
- Easy to clean
- Applicable in an HACCP environment (indirect food contact)

PROTECTION MADE EASY



# The hygiene range contains the following products :



## Saniguard Aquapox

2,5L • 10L



**Aquapox** is a two component water thinnable epoxy paint, used as finishing coat for indoor applications (for example walls and ceilings) on:


- Mineral substrates (concrete, brick, masonry, ...)
- Ferrous and non ferrous metals treated with Aquabond Brush/Spray as a primer.

**Aquapox** has the following properties :

- High saponification
- Good elastic properties
- Bacteriostatic and fungistatic nature
- Good resistance to chemicals
- Applicable in an HACCP environment (indirect food contact)

## Saniguard Oxypaint SL Floor

4L

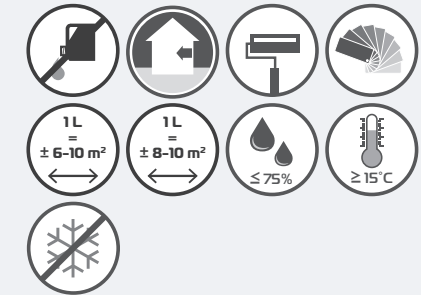

**Oxypaint SL Floor** is a solvent free two component finishing coat based on epoxy binders which can be used for indoor industrial applications.

**Oxypaint SL Floor** has the following properties :

- Excellent abrasion resistance
- Adequate resistance to softeners used in car tires (black stripes)
- Very good resistance to chemicals
- Solid water resistance
- Applicable in an HACCP environment (indirect food contact)


PROTECTION MADE EASY

# The hygiene range contains the following products :



## Cryltane CF Finish

4L

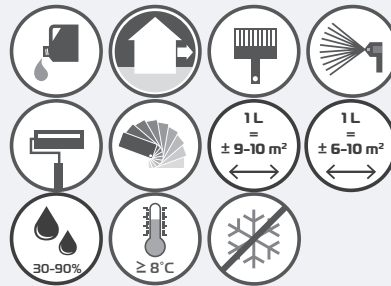


**Cryltane CF Finish** is a two component polyurethane paint for mineral surfaces that can be used for outdoor applications on concrete, brick, cement, masonry and so on.

**Cryltane CF Finish** has the following properties :

- High saponification- and chemical resistance
- Sufficient water vapor permeability
- Very low water penetration, even when it rains heavily
- Very low dirt adhesion: the coating can easily be cleaned under high pressure or steam cleaning
- Applicable in an HACCP environment (indirect food contact)

## Mixtane

1KG • 5KG

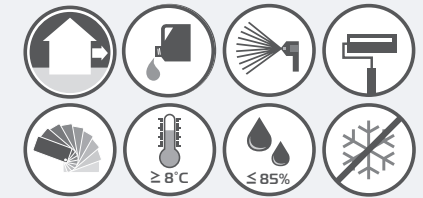

**Mixtane** is a two component high performance acrylic polyurethane and is used as a high quality finishing coat on machines, plastics and floors.

**Mixtane** has the following properties :

- Good light resistance, thermal stability, colour stability and chemical resistance
- Very good gloss retention
- Solid corrosion resistance
- Fast air drying or accelerated drying
- Hardness, elasticity and abrasion resistance assured
- Applicable in an HACCP environment (indirect food contact)

PROTECTION MADE EASY

# The hygiene range contains the following products :



## Cryltane DTS 20

1L • 4L • 10L




**Cryltane DTS 20** is a two-pack mat acrylic polyurethane paint with an excellent adhesion on steel, aluminium, galvanised surfaces, stainless steel, OSB plates, wood, MDF, OSB plates, a lot of plastics (hard PVC, ABS, polyester....) and mineral surfaces (walls, floors).

**Cryltane DTS 20** is used as primer and finishing coat in one. It is a good anticorrosion primer based on zinc phosphate. It is weather and chemically resistant. The cured paint film is characterized by a high hardness combined with elasticity.

**Cryltane DTS 20** can also be applied by spray as spatter finish on machines, office machinery, and lab equipment. Surface defects can easily be masked when using this technique.

## Cryltane DTS 40

1L • 4L • 10L



**Cryltane DTS 40** is a two-pack low satin acrylic polyurethane paint with an excellent adhesion on steel, aluminium, galvanised surfaces, stainless steel and many plastics.

**Cryltane DTS 40** is used as primer and finishing coat at the same time. It is a good anticorrosion primer based on zinc phosphate. It is weather and chemically resistant. The cured paint film is characterized by a high hardness combined with elasticity.

**Cryltane DTS 40** can be applied by spray as spattered finish.

PROTECTION MADE EASY

# The hygiene range contains the following products :



## Crytane DTS 60

1L • 4L • 10L



**Crytane DTS 60** is a semi-gloss two-pack acrylic polyurethane paint with an excellent adhesion on steel, aluminium, galvanised surfaces, stainless steel and many plastics.

**Crytane DTS 60** is used as primer and finishing coat at the same time. It is a good anticorrosion primer based on zinc phosphate. It is weather and chemically resistant. The cured paint film is characterized by a high hardness combined with elasticity.

**Crytane DTS 60** can be applied by spray as spatter finish.

## Liboclean

1L • 2,5L • 10L




**Liboclean** is a good cleanable, durable wall paint based on acrylic resin for inside applications on mineral surfaces.

**Liboclean** has the following properties :

- Low satin gloss degree
- Can be perfectly cleaned without being shiny
- Good hiding power
- Little dirt absorption
- Easy handling
- Applicable in an HACCP environment (indirect food contact)

PROTECTION MADE EASY

## Our technical specifications summarized :

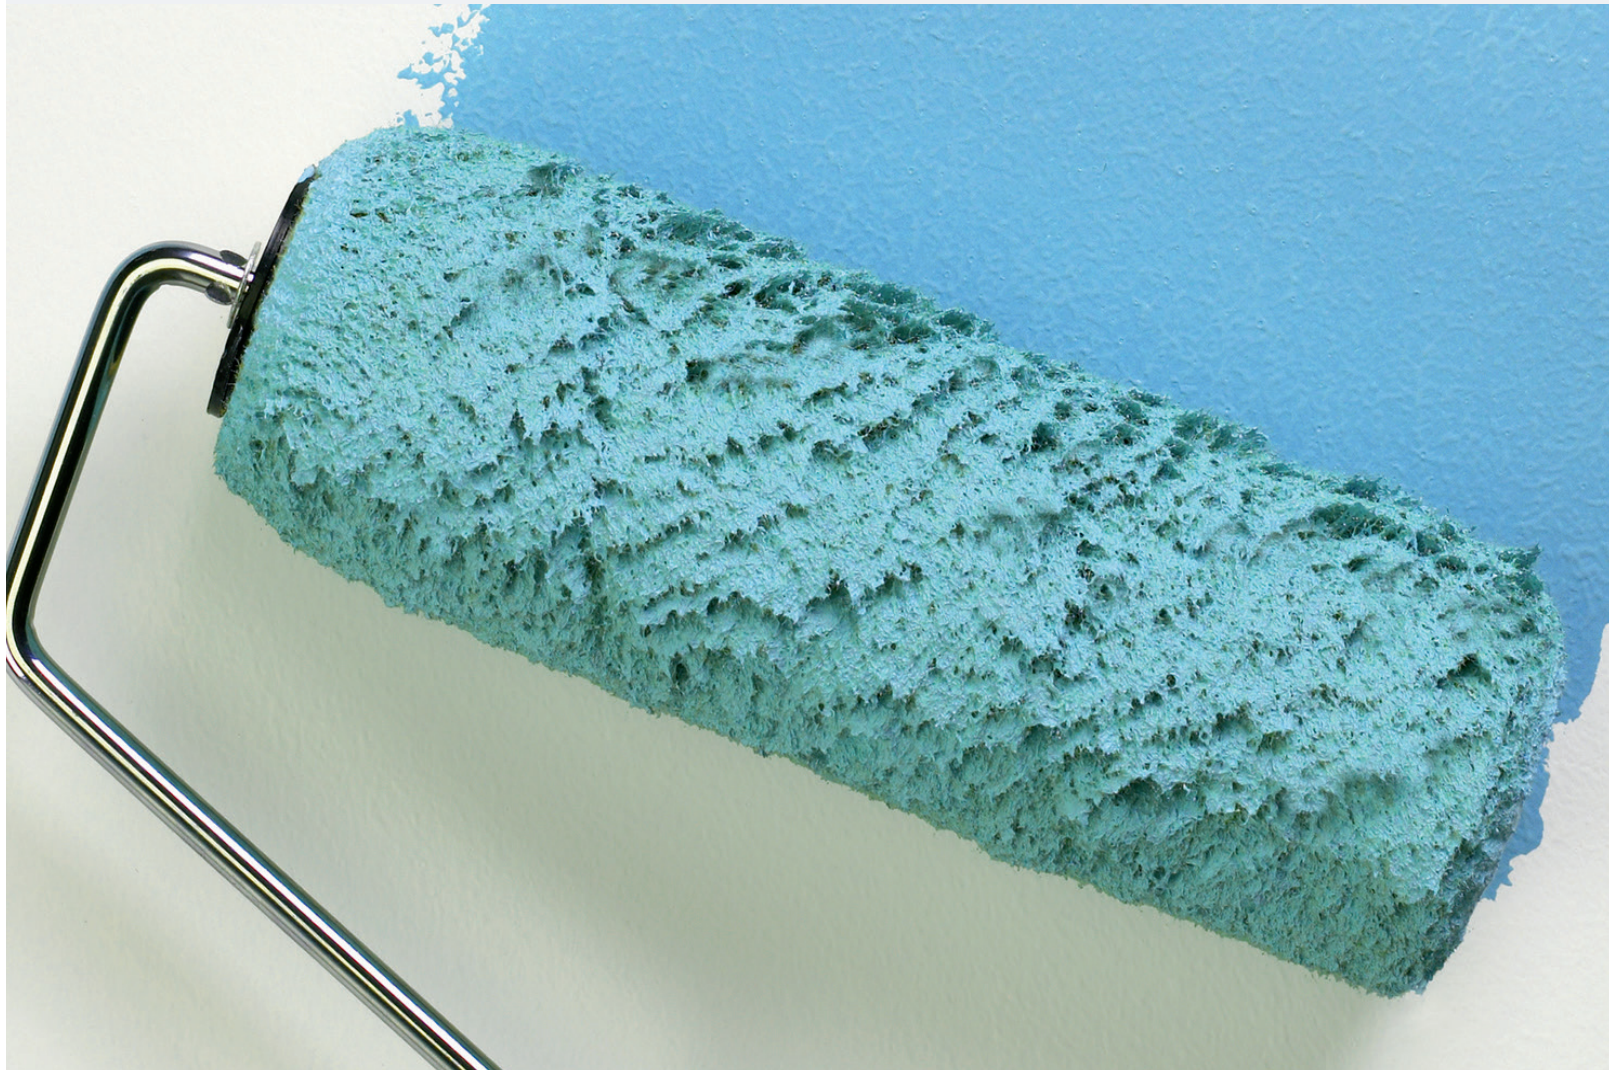

Libert Paints has a long tradition of intensive laboratory research. All our HACCP products are developed in house and tested before being delivered to the customer. Many tests are executed in house with our own measuring equipment. Other tests are being executed externally like for instance at the WTCB, CORI, Unifap, Quality Labs, BVI ... In that way we constantly evaluate ourselves and we try to develop the ideal product for you. Detailed test reports are available on request.

Thanks to our years of experience as a paint manufacturer and our very extended list of references, we recommend this high performance paint with confidence.

**PROTECTION MADE EASY**

 **Libert**  
building paints

# Our technical specifications summarized :



	Aquafloor	Aquapox	Cryltane CF Finish	Cryltane DTS 20	Cryltane DTS 40	Cryltane DTS 60	Liboclean	Mixtane	Oxypaint SL Floor
<b>Base</b>	Water	Water	Solvent	Solvent	Solvent	Solvent	Water	Solvent	Solvent free
<b>Gloss Gardner 60°</b>	60	40	60	20 (± 5)	40 (± 10)	60 (± 10)	< 7	60-90	60
<b>Density</b>	1,33 kg/L	1,35 kg/L	1,35 kg/L	1.40 ± 0.05	1.35 ± 0.05	1.33 ± 0.05	1.21 ± 0.05	1,15 kg/L	1,49 kg/L
<b>Potlife</b> (at	2 h	2,5 h	6 h	± 5 h	± 6 h	± 6 h	-	6 h	40 mins
<b>Solids content</b>									
• In volume	49 ± 3%	50 ± 3%	58 ± 3%	60 ± 2%	60 ± 2%	62 ± 2%	40 ± 2%	44 ± 2%	100
• In weight	62 ± 3%	63 ± 3%	-	74 ± 2%	75 ± 2%	74 ± 2%	50 ± 2%	-	100
<b>VOC</b> (not diluted)	< 50 g/L	< 50 g/L	380 g/L	< 370 g/L	< 377 g/L	< 355 g/L	< 20 g/L	480 g/L	0 g/L
<b>Drying times</b> (at 20°C)									
• Dust dry	-	4 h	30 mins	30 mins	40 mins	40 mins	-	na 15 mins	< 2 h
• Tack free	5 h	6 h	2 à 3 h	3 h	5 h	4 h	30 min	na 3 h	< 10 h
• Dry	11 h	10 h	24 h	12 h	14 h	12 h	2 h	na 12 h	24 h
<b>Recoatable after</b> (at 20°C)	16 h	11 h	16 h	16-24 h	16-24 h	16-24 h	4 h	16 h	24 h

PROTECTION MADE EASY



## Our technical specifications summarized :



	Aquafloor	Aquapox	Cryltane CF Finish	Cryltane DTS 20	Cryltane DTS 40	Cryltane DTS 60	Liboclean	Mixtane	Oxypaint SL Floor
<b>Recommended layer thickness <math>\mu\text{m}</math></b>	60-80	60-80	50	60	60	60	-	60	60
<b>Gloss and colour stability</b>	Interior	Interior	Very good	Good	Very good	Very good	Interior	Excellent	Good
<b>Lavability</b>	Very good	Very good	-	-	-	-	Excellent	Excellent	Excellent
<b>Theoretical yield (60 <math>\mu\text{m}</math> dry)</b>	$\pm 8 \text{ m}^2/\text{L}$	$8 \text{ m}^2/\text{L}$	$6-10 \text{ m}^2/\text{L}$	$10 \text{ m}^2/\text{L}$	$10 \text{ m}^2/\text{L}$	$10 \text{ m}^2/\text{L}$	$10-12 \text{ m}^2/\text{L}$	$8-10 \text{ m}^2/\text{kg}$	$8-10 \text{ m}^2/\text{L}$
<b>Food certificate</b>	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Bacteriostatic properties</b>	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

For a more detailed overview, please do not hesitate to ask our technical data sheets or test reports.

PROTECTION MADE EASY





## Application areas :

- Food processing companies and dairy companies
- Restaurants and commercial kitchens
- Hospitals and medical offices
- Medical and pharmaceutical enterprises and laboratories
- Day care centers for children and schools
- Service flats, retirement homes and nursing homes
- Showrooms
- Storage facilities
- Crowded public areas



PROTECTION MADE EASY



More information about Libert Paints :  
contact our sales and technical  
representatives:

LIBERT PAINTS bv  
Haven 8210A | Langerbruggekaai 6 | 9000 Gent  
T: +32 (0)9 216 88 70  
F: +32 (0)9 226 61 81  
info@libertpaints.com  
www.libertpaints.com

RNR 7 - 24/10/2019

PROTECTION MADE EASY

 **Libert**  
building paints