


## DSK-T | BY-PASS BUTTERFLY DAMPER VALVE

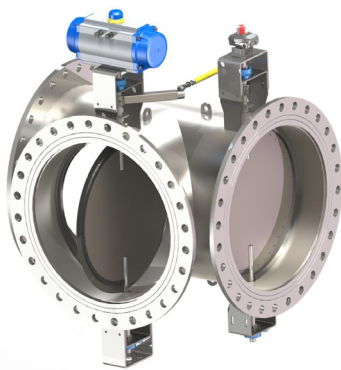

**APPLICATION:**  
For On/Off service

**RANGE:**  
DN 250 – 3000 or rectangular/square (DSK-TR) section or custom build

**CONNECTION:**  
Flanged, butt-weld  
Flange drilling in accordance with:  
EN1092-1, DIN86044, DIN28031, JIS7805, ASME B 16.5 Cl. 150 or 300, ASME 16.47  
Serie A, B or custom build

**INSPECTION & TESTING:**  
FCI 70-2 Class I, II & III available (0.1%- KV90)  
EN12266

**TEMPERATURE RANGE:**  
-40 / + 750°C

**MATERIAL:**  
Carbon Steel, AISI304, AISI316, AISI253MA, AISI321, AISI309, Alloy 800HT / 625, ...

**DESIGN RULES:**  
EN12516-1, EN12516-2, ANSI 16.34, EN1090

**FACE 2 FACE:**  
Manufacturer standard or according customer specification

**OPERATED:**  
Handlever, gearbox, pneumatic actuator, electrical actuator

### DO YOUR NEEDS GO BEYOND A STANDARD PRODUCT?

V.V.C. actively helps you customize your existing products or develops together with you and its engineers, products that are tailored to your application.

**Please contact us:** [info@vvc-valves.com](mailto:info@vvc-valves.com) or +32 (0)3 491 97 70

1. air control

2. air on/off

3. exhaust on/off

4. exhaust control

5. ash

6. chimney

7. solids

8. transport