


DSK-D | BUTTERFLY DAMPER VALVE WITH SEALING AIR SYSTEM FOR 100% TIGHTNESS

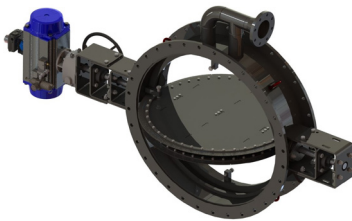

APPLICATION:
For On/Off service

RANGE:
DN 300 – 4000

CONNECTION:
Flanged, Butt-weld
Flange drilling in accordance with:
EN1092-1, DIN86044, DIN28031, JIS(7805 – 5K – 10K), ASME B 16.5 Cl. 150 or 300, ASME 16.47 Serie A, B or custom build

INSPECTION & TESTING:
FCI 70-2 Class III (0.1%- KV90)
100% sealing by means of sealing air (fan)
EN12266

TEMPERATURE RANGE:
-40 / +750°C

MATERIAL:
Carbon Steel, AISI304, AISI316, AISI253MA, AISI321, AISI309, Alloy 800HT / 625, ...

FACE 2 FACE:
Manufacturer standard or according customer specification

OPERATED:
Gearbox, pneumatic actuator, electrical actuator

DO YOUR NEEDS GO BEYOND A STANDARD PRODUCT?

V.V.C. actively helps you customize your existing products or develops together with you and its engineers, products that are tailored to your application.

Please contact us: info@vvc-valves.com or +32 (0)3 491 97 70

1. air control

2. air on/off

3. exhaust on/off

4. exhaust control

5. ash

6. chimney

7. solids

8. transport