


# CK | BUTTERFLY VALVE - CONTAINER VALVE

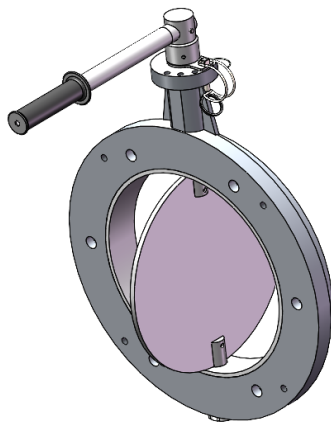

**APPLICATION:**

On/Off - solids

**RANGE:**

DN 300

**CONNECTION:**

Wafer, Lug

**INSPECTION & TESTING:**

Tightness: Product Tight (Granulates)

**TEMPERATURE RANGE:**

-20 / +100°C

**MATERIAL:**

Aluminium, AISI304, AISI316, .....

**FACE 2 FACE:**

52 mm

**OPERATED:**

Handlever

**DO YOUR NEEDS GO BEYOND A STANDARD PRODUCT?**

V.V.C. actively helps you customize your existing products or develops together with you and its engineers, products that are tailored to your application.

**Please contact us:** [info@vvc-valves.com](mailto:info@vvc-valves.com) or +32 (0)3 491 97 70

1. air control

2. air on/off

3. exhaust on/off

4. exhaust control

5. ash

6. chimney

7. solids

8. transport